

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
20 March 2003 (20.03.2003)

PCT

(10) International Publication Number
WO 03/023468 A1

(51) International Patent Classification⁷: G02B 6/10

(74) Agent: ALTMAN, Daniel, E.; Knobbe, Martens, Olson and Bear, LLP, 2040 Main Street, Fourteenth Floor, Irvine, CA 92614 (US).

(21) International Application Number: PCT/US02/29028

(22) International Filing Date:
10 September 2002 (10.09.2002)

(84) Designated States (*regional*): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR).

(25) Filing Language: English

(26) Publication Language: English

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments


(30) Priority Data:
60/318,456 10 September 2001 (10.09.2001) US
60/318,445 10 September 2001 (10.09.2001) US

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(71) Applicant: CALIFORNIA INSTITUTE OF TECHNOLOGY [US/US]; 1200 East California Boulevard, 3230 MC 201-85, Pasadena, CA 91125 (US).

(72) Inventors: GUNN, Lawrence, Cary, III; 1008 East Palm Street, Altadena, CA 91001 (US). SCHERER, Axel; 1900 Catalina Street, Laguna Beach, CA 92651 (US).

(54) Title: STRIP LOADED WAVEGUIDE WITH LOW-INDEX TRANSITION LAYER

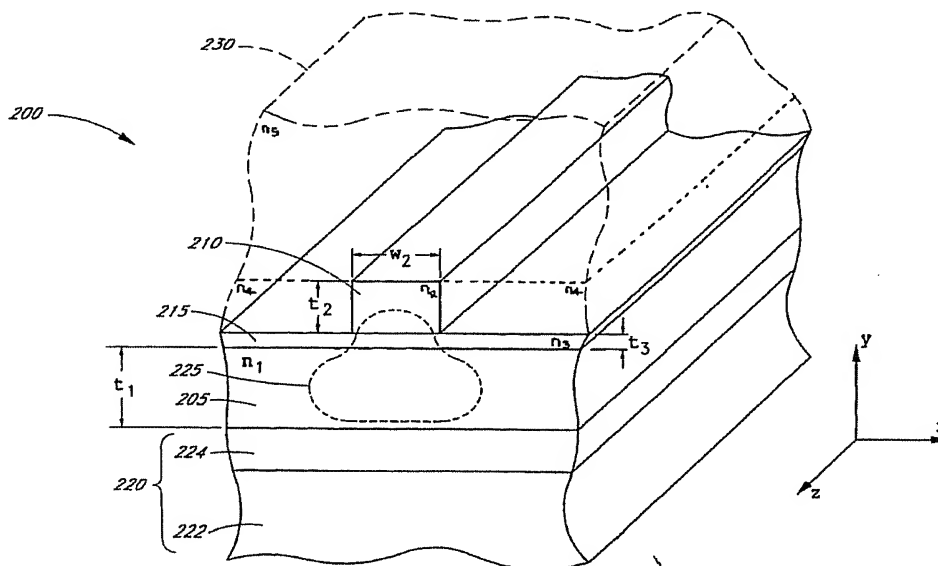

(57) **Abstract:** A strip loaded waveguide (200) comprises a strip (210) and a slab (205), wherein the strip is separated from the slab. Nevertheless, a guiding region (225) is provided for propagating an optical mode and this guiding region extends both within the strip and the slab. A layer of material (215) having an index of refraction lower than that of the strip and the slab may be disposed between and separate the strip and the slab. In one embodiment, the slab comprises a crystalline silicon, the strip comprises polysilicon or crystalline silicon, and the layer of material therebetween comprises silicon dioxide. Such waveguides may be formed on the same substrate with transistors. These waveguides may also be electrically biased to alter the index of refraction and/or absorption of the waveguide.

WO 03/023468 A1

STRIP LOADED WAVEGUIDE WITH LOW-INDEX TRANSITION LAYER

Background of the Invention

Field of the Invention

[0001] The present invention is directed to waveguides, and more particularly, to waveguides formed on a substrate.

Description of the Related Art

[0002] Light offers many advantages when used as a medium for propagating information, the foremost of which are increased speed and bandwidth. In comparison with electrical signals, signals transmitted optically can be switched and modulated faster and can include an even greater number of separate channels multiplexed together. Accordingly, lightwave transmission along optical fibers is widespread in the telecommunications industry. In an exemplary fiber optic communication system, a beam of light may be emitted from a laser diode and modulated using an electro-optical modulator that is driven by an electrical signal. This electrical signal may correspond to voice or data which is to be transmitted over a distance between, e.g., two components in a computer, two computers in a network, or two phones across the country or the world. The light travels in an optical fiber to a location where it is detected by an optical sensor which outputs voltage that varies in accordance with the modulation of the optical beam. In this manner, information can be rapidly transported from one location to another.

[0003] Accordingly, various components have been developed to process and manipulate optical signals. Examples of such components include modulators, switches, filters, multiplexers, demultiplexers to name a few. Other useful optical components include lasers and optical detectors as well as waveguides. Many of these components can be formed on a substrate. It is therefore highly desirable to combine a variety of such components into a system that is integrated onto a single substrate. In such a system, optical waveguides theoretically could be used to propagate optical signals between components on the substrate.

Summary of the Invention

[0004] One aspect of the present invention comprises a strip loaded waveguide comprising a slab portion having a first refractive index n_1 , a strip portion having a second refractive index n_2 , and a transition portion between the slab portion and the strip portion.

The transition portion has a refractive index n_3 that is less than the first refractive index n_1 and the second refractive index n_2 .

[0005] Another aspect of the present invention comprises a strip loaded waveguide comprising a slab portion and a strip portion. The strip portion is disposed with respect to the slab portion to form a guiding region. A first portion of the guiding region is in the strip portion, and a second portion of the guiding region is in the slab portion. The guiding region propagates light in a single spatial mode and only in a transverse electric mode.

[0006] Another aspect of the present invention comprises a strip loaded waveguide comprising a slab portion and a strip portion. The strip portion is disposed with respect to the slab portion to form a guiding region. A first portion of the guiding region is in the strip portion, and a second portion of the guiding region is in the slab portion. The guiding region propagates light in a single spatial mode with a cross-sectional power distribution profile having two intensity maxima. A first intensity maxima is located in the slab portion, and the second intensity maxima is located in the strip portion.

[0007] Another aspect of the present invention comprises a waveguide having a guiding region for guiding light through the waveguide. The guiding region comprises a layer of polycrystalline silicon juxtaposed with a layer of crystal silicon.

[0008] Yet another aspect of the present invention comprises an apparatus comprising a strip loaded waveguide, a transistor, and a substrate. The strip loaded waveguide comprises a slab portion having a first refractive index n_1 , a strip portion having a second refractive index n_2 , and a transition layer between the slab portion and the strip portion. The transistor comprises first and second portions and a dielectric layer therebetween. The dielectric layer of the transistor and the transition layer of the waveguide comprise the same material. The substrate supports both the transistor and the waveguide.

[0009] Yet another aspect of the present invention comprises an apparatus comprising a strip loaded waveguide, a transistor, and a substrate. The strip loaded waveguide comprises a slab portion having a first refractive index n_1 and a strip portion having a second refractive index n_2 . The transistor comprises first and second portions and a dielectric layer therebetween. The second portion of the transistor and the slab portion of the waveguide are formed of a single layer of material. The substrate supports both the transistor and the waveguide.

[0010] Still another aspect of the present invention comprises a method of changing the index of refraction of a strip loaded waveguide comprising a semiconductor slab and a conductive strip that are separated by an insulating layer. The method comprises dynamically changing the carrier distribution in the semiconductor slab.

[0011] Still another aspect of the present invention comprises a waveguide apparatus. The waveguide apparatus comprises a slab portion having a first refractive index, a strip portion having a second refractive index, and a transition portion between the slab portion and the strip portion. The transition portion has a third refractive index that is less than the first refractive index and the second refractive index. The waveguide apparatus additionally comprises a voltage source configured to apply a voltage between the strip portion and the slab portion such that an electric field is introduced between the strip portion and the slab portion.

Brief Description of the Drawings

[0012] Preferred embodiments of the present invention are described below in connection with the accompanying drawings, in which:

[0013] FIGURE 1 is a schematic illustration of a generic subsystem comprising a plurality of components connected together via optical waveguides;

[0014] FIGURE 2 is a perspective cutaway view of a strip loaded waveguide comprising a slab having a relatively high refractive index, a strip also having a relatively high refractive index formed on the slab, and a transition layer having a relatively low refractive index positioned between the slab and the strip;

[0015] FIGURE 3 is a cross-sectional view of a strip loaded waveguide further including a map of an exemplary magnetic field distribution corresponding to the fundamental mode supported by the strip loaded waveguide;

[0016] FIGURE 4 is a plot on axes of intensity (in arbitrary units) and position, Y, (in arbitrary units) juxtaposed adjacent a cross-sectional view of the strip loaded waveguide showing the optical intensity profile of the fundamental within the waveguide structure;

[0017] FIGURE 5 is a cross-sectional schematic illustration of a strip loaded waveguide and a transistor fabricated on the same substrate;

[0018] FIGURE 6 is a cross-sectional schematic illustration of a strip loaded waveguide including gate spacers;

[0019] FIGURE 7 is a cross-sectional schematic illustration of a strip loaded waveguide configured to be biased electronically; and

[0020] FIGURE 8 is a cross-sectional schematic illustration of an alternative strip loaded waveguide configured to be biased electronically so as to alter the index of refraction predominately within the strip.

[0021] FIGURE 9 is a cross-sectional schematic illustration of a strip loaded waveguide comprising a polysilicon strip on a crystal silicon slab and not including a low-index transition layer therebetween.

Detailed Description of the Preferred Embodiments

[0022] One preferred embodiment of the present invention comprises an integrated optical subsystem formed on a substrate. Such subsystems may be parts of a larger optical system which may or may not be formed on a single substrate. FIGURE 1 illustrates a generic integrated optical subsystem 140 formed on the surface of substrate 130. The substrate 130 may serve as a platform for the integrated optical subsystem 140, and thus preferably comprises a volume of material of sufficient thickness to provide physical support for the integrated optical subsystem 140. This substrate preferably comprises a material such as silicon or sapphire

[0023] In the embodiment illustrated in FIGURE 1, a plurality of components 100 are connected by one or more integrated optical waveguides 110 and a splitter 120. The components 100 may comprise optical components, electronic components, and optoelectronic or electro-optic components. The optical and electro-optical components may include waveguide devices or non-waveguide devices, i.e., light may propagate through such components and be guided or unguided. Examples of optical, electro-optic, and optoelectronic components include, but are not limited to, light sources, detectors, modulators, reflectors, polarizers, phase shifters, filters, and mode-converters.

[0024] The integrated optical waveguides 110 may be arranged in any configuration to connect components 100 as desired for a particular application. For example, an optical signal from a one component can be transmitted to a plurality of other components through the use of splitter 120, as shown. The variety of configurations of waveguides and components is unlimited. Waveguides can follow different paths and can bend and turn, split, cross, and can be combined. Different components, electrical, optical, electro-optic, and optoelectronic can be included on the substrate, and in various embodiments, can be optically coupled to the waveguides and to each other. In addition,

electrical connections can be made to the components and to the waveguides as is discussed more fully below. The arrangement of waveguides and components is not to be considered limited but may include any variety of combinations and juxtapositions.

[0025] In some embodiments, the substrate 130 will support a plurality of material layers which together create layers of integrated optical subsystems stacked atop each other. Each of these layered integrated optical subsystems may include waveguides and/or components, electrical, optical, electro-optic, and optoelectronic, formed within a given layer. Such multi-layered stacking will add to the variety of integrated optical designs that are possible. Light can be directed between the various layers using waveguides situated therebetween, gratings such as for example waveguide gratings, and Bragg diffraction elements such as distributed Bragg gratings. Multilayer optical films such as thin film filters can be incorporated to introduce the desired phase delay and may be used to enable various functionalities, such as for example optical filtering. The structures and methods involved in coupling light from one layer to another, however, are not limited to those recited herein.

[0026] In general, optical waveguides comprise a core region comprising material that is at least partially transparent. This core region is surrounded by a cladding region that confines light within the core region. Some optical energy, often referred to as the evanescent energy or the evanescent field, however, may exist outside the core region and within the cladding region.

[0027] In certain waveguides, the core region comprises a first material having a first refractive index, and the cladding region comprises a second material having a second refractive index, the refractive index of the core region being greater than the refractive index of the cladding region. A core/cladding interface is located at the boundary between the core region and the cladding region. In such embodiments, when light in the core region is incident upon this core/cladding interface at an angle greater than the critical angle, the light is reflected back into the core region. This effect is referred to as total internal reflection. In this manner, optical signals can be confined within the core region due to total internal reflection at the core/cladding interface.

[0028] Waveguides can be fabricated in a wide variety of geometries and configurations. An optical fiber is a specific type of waveguide that fits the description above. An optical fiber generally comprises a circularly cylindrical core surrounded by an circularly cylindrical or annular cladding layer. The core has a relatively high refractive

index and the cladding has a relatively low refractive index. The core and cladding may comprise, e.g., silica or silica based materials, and are typically flexible, with core diameters of approximately 10 μm for single-mode fiber. As discussed above, optical fibers are often used to transmit optical signals across large distances, ranging for example from centimeters to thousands of kilometers.

[0029] Optical fibers should be distinguished from integrated optical waveguides, which are generally associated with a substrate. The integrated optical waveguide may for example be situated on the substrate, in a substrate, or partially on and partially in the substrate. The integrated optical waveguide may be part of the substrate itself but preferably comprises of one or more layers of material positioned on a surface of the substrate. Examples of integrated optical waveguides include channel waveguides, rib or ridge waveguides, slab waveguides, and strip loaded waveguides, all of which are well-known in the art. In contrast to optical fibers, integrated optical waveguides are less likely to have a circularly symmetric cross-section although in theory they can be circularly cylindrical. Additionally, integrated optical waveguides are generally used to transmit optical signals between locations on the substrate, and thus preferably have lengths ranging from microns to centimeters.

[0030] In accordance with conventional usage in the art, optical components that are integrated onto a substrate with integrated optical waveguides, are collectively referred to herein as integrated optics. Such optical component may for example, process, manipulate, filter or otherwise alter or control optical signals propagating within the waveguides. As discussed above, these components themselves may be waveguides that guide light.

[0031] One of the simplest integrated optical waveguide configurations is the conventional slab waveguide. The slab waveguide comprises a thin, planar slab surrounded by cladding regions. The cladding regions may take the form of first and second (for example, upper and lower) cladding layers on either side of the slab. The two cladding layers need not comprise the same material. In this simplified example, the slab may be planar with substantially parallel planar boundaries at the interfaces with the first and second cladding layers. Generally, the slab has a higher refractive index than either of the cladding layers. Light can therefore be confined in one dimension (e.g., vertically) within the slab. In this configuration of the slab waveguide, optical energy is not confined laterally to any portion of the slab, but extends throughout the slab due to total internal

reflection at the planar boundaries between the slab and the surrounding upper and lower cladding layers.

[0032] A strip loaded waveguide is formed by positioning a strip on the slab of a slab waveguide. The slab and the strip located thereon may be surrounded on opposite sides by the first and second (e.g., upper and lower cladding layers). Preferably, the strip has a refractive index that is greater than that of either cladding layer, however, the index of the strip is preferably approximately equal to that of the slab. The presence of the strip positioned on the slab induces an increase in effective index of the slab in the region beneath the strip and in proximity thereto.

[0033] Accordingly, the region within the slab that is beneath the strip and in proximity thereto has a higher effective refractive index than other portions of the slab. Thus, unlike the slab waveguide wherein optical energy propagates throughout the planar slab, the strip loaded waveguide substantially confines optical energy to the region of the planar slab layer under the high-index strip. In a strip loaded waveguide, therefore, an optical signal can be propagated along a path in the slab defined by the region over which the high-index strip is placed on the slab. Thus, slab waveguides defining any number and variations of optical pathways, can be created by depositing one or more strips onto the slab having the shape and orientation of the desired optical pathways.

[0034] FIGURE 2 is a schematic cutaway illustration of a preferred embodiment of a strip loaded waveguide 200. The strip loaded waveguide 200 comprises a slab 205 having a first refractive index n_1 and a strip 210 having a second refractive index n_2 . In addition, the strip loaded waveguide 200 has a transition layer 215 having a third refractive index n_3 . The transition layer 215 is positioned between the slab 205 and the strip 210, such that the slab 205 and the strip 210 do not directly contact each other. The refractive index of the transition layer n_3 is less than the refractive index of the slab n_1 and the refractive index of the strip n_2 .

[0035] In certain embodiments of the invention, semiconductor materials used in conventional processes for fabrication of semiconductor microelectronics are employed to create strip loaded waveguides. These materials include, but are not limited to, crystalline silicon, polysilicon and silicon dioxide (SiO_2). In particular, in one preferred embodiment, the slab 210 comprises single crystal silicon, the transition layer 215 comprises silicon dioxide and the strip 210 comprises polysilicon, although in other embodiments, the strip 210 may comprise crystal silicon. The crystal silicon slab 215 and

the polysilicon strip 210 may be doped, for example, in cases where the slab 215 or the strip 210 are to be electronically conductive. In applications where the slab 215 or the strip 210 need not be electronically conductive, the slab 215 and the strip 210 are preferably undoped to minimize absorption losses.

[0036] As is well known, single crystal silicon is used to fabricate semiconductor microelectronics and integrated circuits (ICs), such as microprocessors, memory chips, and other digital as well as analog ICs, and thus single crystal silicon is well characterized and its properties are largely well understood. The term single crystal silicon is used herein consistently with its conventional meaning. Single crystal silicon corresponds to crystalline silicon. Single crystal silicon, although crystalline, may include defects such that it is not truly a perfect crystal, however, silicon having the properties conventionally associated with single crystal silicon will be referred to herein as single crystal silicon despite the presence of such defects. The single crystal silicon may be doped either *p* or *n* as is conventional. Such doping may be accomplished, for example, by ion implantation.

[0037] Single crystal silicon should be distinguished from polysilicon or "poly". Polysilicon is also used to fabricate semiconductor microelectronics and integrated circuits. The term polysilicon or "poly" is used herein consistently with its conventional meaning. Polysilicon corresponds to polycrystalline silicon, silicon having a plurality of separate crystalline domains. Polysilicon can readily be deposited for example by CVD or sputtering techniques, but formation of polysilicon layers and structures is not to be limited to these methods alone. Polysilicon can also be doped *p* or *n* and can thereby be made substantially conductive. In general, however, bulk polysilicon exhibits more absorption losses in the near infrared portion of the spectrum than a similar bulk single crystal silicon, provided that the doping, temperature, and other parameters are similar.

[0038] As illustrated in FIGURE 2, the strip loaded waveguide 200 is preferably located on a supporting structure 220 or substrate. The supporting structure 220 serves to support the strip loaded waveguide 200 and preferably comprises a material such as a silicon or sapphire substrate 222. Additionally, the supporting structure 220 may also include a cladding layer 224, which aids in confining optical energy within the slab portion 205. Accordingly, this layer 224 preferably has a refractive index that is low in comparison to the refractive index of the slab 205.

[0039] In one preferred embodiment, the supporting structure 220 comprises a silicon substrate 222 having a cladding layer 224 of silicon dioxide formed thereon. The silicon dioxide layer 224 on the silicon substrate 222 with an index of approximately 1.5 serves as a lower cladding layer for the slab 205 having an index of approximately 3.5. This silicon substrate 222 may comprise doped silicon and may be a commercially available silicon wafer used for fabricating semiconductor integrated circuits. In other embodiments, the cladding layer 224 may comprise silicon nitride. The index of refraction of silicon nitride is approximately 1.9.

[0040] In alternative embodiments, wherein the supporting structure 220 comprises a material other than silicon, the cladding layer 224 of silicon dioxide may not be present. For example, the slab 205 may rest directly on a sapphire substrate 222. Processes for growing crystal silicon on sapphire have been developed. In general, in these cases, the supporting structure 220 preferably has an index of refraction lower than that of the slab 205. In other embodiments, an additional cladding layer 224 may be formed on the these non-silicon substrates.

[0041] The slab 205 is therefore disposed either on the substrate 222 or on a layer 224 (preferably the cladding) formed over the substrate. This cladding layer 224 itself may be formed directly on the substrate 222 or may be on one or more layers formed on the substrate 222. The slab portion 205 may span the substrate 222 or extend over only a portion of the substrate 222. As discussed above, the slab 205 preferably comprises single crystal silicon and has an index of refraction n_1 on average of about 3.5 and has a thickness t_1 preferably between about $\frac{\lambda}{6n}$ and $\frac{\lambda}{4n}$, and more preferably about $\frac{\lambda}{4n}$, where n is the index of refraction. This thickness, t_1 , determines in part the optical mode or modes supported by the strip loaded waveguide and depends partially on the geometry of the structure. In alternative embodiments, the slab 205 may comprise materials other than single crystal silicon and may be doped or undoped and thus may have different refractive indices. The slab 205, however, preferably comprises crystal silicon. Localized doping, such as used to create the source, drain, and channel regions in a transistor, may affect the optical properties of the slab 205. The index of refraction in localized regions of the slab can vary slightly due to doping by ion implantation.

[0042] In general, the strip 210 is disposed above and in a spaced-apart configuration with respect to the slab 205. The strip 210 may comprise doped

polycrystalline silicon having an index of refraction n_2 of approximately 3.5. In alternative embodiments, the strip 210 may comprise doped single crystal silicon having an index of refraction n_2 on average about 3.5. As discussed above, however, the strip may also be undoped and may comprise materials other than polysilicon or crystal silicon although these materials are preferred. An example of one such alternative material that may be used to form the strip 210 is silicon nitride (Si_3N_4), which has an index of refraction n_3 of approximately 1.9.

[0043] The dimensions of the strip 210 may vary and depend in part on the overall composition and geometry of the waveguide. As with the slab 205, however, the size of the strip 210 determines in part the number of modes to be supported by the waveguide and the wavelength of these modes.

[0044] The transition layer 215 is positioned between the slab 205 and the strip 210. This transition layer 215 may span the slab 205 as illustrated in FIGURE 2 or extend over only a portion of the substrate 205. Preferably, the refractive index of the transition layer 215 is less than the refractive index of the polysilicon strip 210 and the crystalline silicon slab 205. In one preferred embodiment, the transition layer 215 comprises silicon dioxide having an index of refraction n_3 of approximately 1.5.

[0045] In various embodiments, the transition layer 215 may include optically active (i.e., gain inducing) material, such as erbium. Waveguide structures that include an optically active gain inducing material in the transition layer 215 can produce gain and amplify or regenerate the strength of the optical signal propagating through the waveguide. Specialized components can be formed using these amplifying structures.

[0046] In certain embodiments, the thickness t_3 of the transition layer 215 is equal to the thickness of the gate oxide layer of transistors (not shown) positioned on the same substrate as the strip loaded waveguide 200 and fabricated in the same process as the strip loaded waveguide 200. The width of the transition layer 215 may be substantially equal to the width w_2 of the strip 210, although in other embodiments, such as illustrated in FIGURE 2, the width of the transition layer 215 is greater than the width w_2 of the strip 210.

[0047] In the waveguide structure illustrated in FIGURE 2, the strip loaded waveguide 200 is covered by one or more coatings 230, although these coatings are optional. Two coatings are shown in FIGURE 2, one with an index of refraction n_4 and another thereon with an index of refraction n_5 . More or less coatings may be used and in

other configurations the coatings 230 can be excluded and replaced instead with air or vacuum. The optional nature of these coatings 230 is emphasized by depicting the coating in phantom in FIGURE 2. These coatings 230, however, are useful for protecting the strip loaded waveguide 200 from damage or interference which may occur due to contact with other objects. Accordingly, the coatings 230 preferably completely covers the strip loaded waveguide 200, although in other case, the coating may extend only over portions of the strip 210 or slab 205.

[0048] The coatings 230 may also serve as a cladding layer, providing confinement of optical energy within the slab 205 and the strip 210. Accordingly, the coatings 230 preferably have indices of refraction n_4 , n_5 less than that of the slab 205 and the strip 210. The coatings 230 may have an index or refraction equal to that of the low-index transition layer 215 and may comprise the same material as the low-index transition layer 215. Alternatively, the coatings 230 may have a different indices of refraction than the transition layer 215 and may comprise different material. In multilayered integrated optical structures, the coatings 230 may serve as a substrate for second strip loaded waveguide in a layer disposed above a first strip loaded waveguide.

[0049] Accordingly, the coatings 230 preferably comprises a solid, possibly electrically insulating material, having a refractive index less than that of the slab 205 and the strip 210. The coatings 230 may, for instance, comprise glass or silicon dioxide. Other materials and, more specifically, other dielectrics may also be employed. Polymeric material, such as for example polyimide may be used in certain applications.

[0050] Confinement of light within the slab 205 is provided because the slab 205 has a higher refractive index than the layers above and below. In one preferred embodiment, for example, light is confined within the silicon slab 205 because the silicon slab 205 has a higher refractive index than the glass coatings 230 covering it. In addition, the silicon slab 205 has a higher index than the silicon dioxide cladding layer 224 immediately below it.

[0051] The light within the slab 205 is confined to portions beneath the strip 210 because of the presence of the strip 210, despite the fact that the strip 210 is separated from the slab 205. The intervening transition layer 215 does not prevent the strip 210 from determining the shape and location of the optical mode(s) supported in the slab 205. The presence of the strip 210 positioned proximally to the slab portion 205 induces an increase in effective index of the slab portion 205 in the region directly under the strip 210 and in

proximity thereto. This increase in effective index defines a relatively high effective index guiding region 225 wherein light in one or more supported optical modes is guided along the strip loaded waveguide 200. The strip loaded waveguide 200 guides supported modes in the guiding region 225 despite the presence of the transition layer 215 between the slab 205 and strip 210. In particular, the transition layer 215 does not prevent the strip 210 from altering the effective index within the slab 205 and more particularly, from raising the effective index within the slab 205. Preferably, the transition layer 215 has a thickness sufficiently small such that the strip 210 can increase the effective index of the slab 205 in regions immediately beneath and in the proximity thereto. The transition layer 215 is sufficiently thin and the strip 210 and the slab 205 are sufficiently close, although physically separated by the intervening transition layer, that the strip 210 can affect the propagation of light within the slab 205. The transition layer 215 also preferably has an index of refraction that is low in comparison with that of the strip 210 and the slab 205.

[0052] The guiding region 225 corresponds to a boundary where a specific portion of the optical energy within the mode, preferably the fundamental mode, is substantially contained and thus characterizes the shape and spatial distribution of optical energy in this mode. Accordingly, the guiding region 225 corresponds to the shape and location of the optical mode or modes in this strip loaded waveguide 200. In the guiding region 225, the electric field and the optical intensity are oscillatory, whereas beyond the guiding region 225, the evanescent field exponentially decays.

[0053] Propagation of an optical signal in the strip loaded waveguide 200 illustrated in FIGURE 2 is further characterized by the spatial distribution of the field strength across the cross-section of the strip loaded waveguide 200. FIGURE 3 illustrates the magnetic field distribution across a cross-section of the waveguide 200 parallel to the x-y plane. This distribution is the result of modeling using finite difference time domain iterations to calculate the horizontal component of the magnetic field in the mode supported by the structure, i.e., the fundamental mode. The electric field is vertically polarized in this example. The case where the transition layer has the same refractive index as the region surrounding the slab was modeled. As shown, the field strength within the fundamental mode is distributed within the slab 205 despite the presence of the transition layer 215 and the separation between the strip 210 and the slab 205. The field, however, is localized within the strip 210 and in the slab 205 within a region proximal to the strip. This field strength distribution is consistent with the guiding region 225 shown in FIGURE 2.

[0054] A schematic diagram of the intensity through the thickness of the waveguide structure is presented in FIGURE 4. This plot shows the optical energy substantially confined within the strip 210 and the region of the slab 205 below and adjacent to the strip 210.

[0055] The intensity profile shown in FIGURE 4 is characterized by the presence of a localized intensity minima 235 in the lowest-order guided mode. The localized intensity minima 235 occurs in the proximity of the transition layer 215 between the strip 210 and the slab 205. Accordingly, this localized minima 235 is likely caused by the presence of the transition layer 215 and the separation of the slab 205 from the strip 210. Nevertheless, the presence of the transition layer 215 does not substantially disrupt the mode. Optical energy can still be propagated along a guiding region 225 partially within the strip 210 and the slab 205. Accordingly, the propagation of light can be controlled and beams can be directed along pathways defined by these strip loaded optical waveguides 200. Integrated optical systems can therefore be constructed wherein light is guided to and from components and thereby manipulated and processed as desired.

[0056] Such integrated optical systems can be fabricated using waveguides similar to those disclosed herein. It will be appreciated that, although the strip loaded waveguide 200 illustrated in FIGURE 2 has a substantially straight configuration, it will be understood that in alternative embodiments, the strip loaded waveguide can have an unlimited variety of alternative configurations and orientations, including but not limited to bends and turns, and intersections with other strip loaded waveguides. See, e.g., FIGURE 1. Additionally, although the strip loaded waveguide 200 illustrated in FIGURE 2 has a rectangular cross-section (parallel to in the x-y plane), other cross-sectional geometries can be used, such as a trapezoidal, elliptical, or rectangular. Also, although not shown in the drawings, the corners and edges may be rounded or otherwise irregularly shaped.

[0057] As indicated above, an optical signal confined within the strip loaded waveguide 200 can be coupled from or is coupled to other optical components, such as for example modulators, switches, and detectors, at waveguide input ports and the waveguide output ports. These optical components may be waveguide structures having the features described above. Such configurations allow for further processing or transmission of the optical signal.

[0058] Furthermore, multiple strip loaded waveguides can be positioned atop each other on the substrate, thereby forming a layered integrated optic structure.

Accordingly, a plurality of strip loaded waveguides can be combined into a system comprising waveguide networks, thus allowing optical signals to be coupled between components. The specifications of such alternate configurations may be determined by the particular application in which the strip loaded waveguide structure is to be used.

[0059] Advantageously, the specific material systems that can be used to implement these strip loaded waveguides have numerous desirable features. Single crystal silicon and polycrystalline silicon are substantially transparent at wavelengths in the near infrared spectrum (i.e., between approximately 1.3 μm and 1.6 μm) and thus provide an efficient medium for the propagation of near infrared light. The combination of silicon (crystalline or polysilicon) and silicon dioxide also possesses a high refractive index contrast, i.e., the difference between the refractive index of the materials is relatively large. In particular, the index of refraction of crystalline silicon and polysilicon is about 3.5 depending on a variety of parameters. In contrast, silicon dioxide has an index of refraction of about 1.5. This disparity in refractive index between silicon and silicon dioxide is approximately 2.0, and is large in comparison for example with the disparity in refractive index between the silica core and silica cladding that make up conventional optical fiber, both of which are about 1.5. The difference between the refractive indices of the core and cladding in silica based fiber is approximately 0.003. This core/cladding index difference in the strip loaded waveguides described above that comprise silicon and silicon dioxide are approximately three orders of magnitude higher than that of silica optical fiber. In other embodiments, the core/cladding index difference is preferably at least about 1.0. High index contrast is advantageous because it provides increased optical confinement of the light within the waveguide. Accordingly, high index contrast allows waveguides having substantially smaller dimensions to be employed. Additionally, sharper bends and smaller bend radii can be incorporated into the waveguides with out excessive losses.

[0060] In addition, certain of the embodiments of the strip loaded waveguide can be fabricated using conventional integrated circuit fabrication processes. For instance, the supporting structure 220 may comprise a commercially available silicon wafer with silicon dioxide formed thereon. Conventional "Silicon-on Oxide" (SOI) processes can be employed to form the silicon slab 205 on a silicon wafer or on a sapphire substrate. Fabrication techniques for forming the a crystal silicon layer on an insulator include, but are not limited to, bonding the crystal silicon on oxide, SIMOX (i.e., use of ion implantation to form oxide in a region of single crystal silicon), or growing silicon on

sapphire. Oxide formation on the silicon slab can be achieved with conventional techniques for growing gate oxides on a silicon active layers in field effect transistors (FETs). Still other processes utilized in fabricating FETs can also be applied. In the same fashion that a polysilicon gate is formed on the gate oxide in field effect transistors, likewise, a polysilicon strip can be formed over the oxide transition region in the strip loaded waveguide. This polysilicon strip can be patterned using well-known techniques such as photolithography and etching. Damascene processes are also considered possible. Accordingly, conventional processes such as those employed in the fabrication of Complementary Metal Oxide Semiconductor (CMOS) transistors can be used to create the waveguide. In other embodiments, crystalline silicon strips can be formed on the transition oxide region using conventional techniques such as SOI processing.

[0061] Another processing advantage is that in the fabrication of polysilicon or silicon strips 210, the transition layer 215 that separates the slab 205 from the strip 210 may in some cases act as an etch stop. For example, in applications where the strip 210 and the slab 205 are etched from the same material, the etch can be configured to stop on the thin transition layer 215 therebetween. This fabrication configuration allows the geometry of the waveguide to be accurately controlled without having to dynamically control the etch depth.

[0062] Another strategy for fabricating the strip loaded waveguide is to obtain a commercially available SOI wafer which comprises a first silicon substrate having a first silicon dioxide layer thereon with a second layer of silicon on the first silicon dioxide layer. The aggregate structure therefore corresponds to Si/SiO₂/Si. The first silicon dioxide layer is also referred to as the buried oxide or BOX. A second silicon dioxide layer can be formed on the SOI wafer and polysilicon or silicon strips 210 can be formed on this structure to create strip loaded waveguides 200 with the second silicon layer corresponding to the slab 205 and the second silicon dioxide layer formed thereon corresponding to the transition layer 215. The thickness of this second silicon dioxide transition layer can be controlled as needed. The polysilicon or silicon strips can be patterned for example using photolithography and etching. Damascene processes are also envisioned as possible.

[0063] In the case where the substrate does not comprise silicon (with a layer of silicon dioxide on the surface), a slab comprising crystal silicon can still be fabricated. For example, crystalline silicon can be grown on sapphire. The sapphire will serve as the lower cladding for the slab. Silicon nitride formed for example on silicon can also be a cladding

for the slab. The formation of the transition layer and the strip on the silicon slab can be performed in a manner as described above.

[0064] Other conventional processes for forming layers and patterning may also be used and are not limited to those specifically recited herein. Employing conventional processes well known in the art is advantageous because the performance of these processes is well established. SOI and CMOS fabrication processes, for example, are well developed and well tested, and are capable of reliably producing high quality products. The high precision and small feature size possible with these processes should theoretically apply to fabrication of strip-loaded waveguides as the material systems are similar. Accordingly, extremely small sized waveguide structures and components should be realizable, thereby enabling a large number of such waveguides and other components to be integrated on a single die. Although conventional processes can be employed to form the strip loaded waveguides described herein, and moreover, one of the distinct advantages is that conventional semiconductor fabrication processes can readily be used, the fabrication processes should not be limited to only those currently known in art. Other processes yet to be discovered or developed are also considered as possibly being useful in the formation of these structures.

[0065] Another advantage of these designs is that in various embodiments electronics, such as transistors, can be fabricated on the same substrate as the strip loaded waveguides. Additionally, integration of waveguides and electronics on the same substrate is particularly advantageous because many systems require the functionality offered by both electronic, optical, electro-optical, and optoelectronic components. For example, with the waveguide structures describe herein, modulators, switches, and detectors, can be optically connected together in a network of waveguides and electrically connected to control and data processing circuitry all on the same die. The integration of these different components on a single die is particularly advantageous in facilitating minimization of the size of devices, such as optical telecommunications devices.

[0066] The integration of integrated optical components and with electronics on a single die is illustrated in FIGURE 5, which depicts a cross-sectional view of a strip loaded waveguide 300 disposed on a substrate 320 that also supports a field effect transistor 350. As discussed above, this substrate 320 may comprise a silicon wafer having a silicon dioxide surface layer, or a sapphire substrate. A silicon layer 305 is formed on the silicon substrate 320, and more particularly on the silicon dioxide surface layer of the substrate.

This silicon layer 305 corresponds both to the slab of the strip loaded waveguide 300 and the active silicon of the transistor 350. Accordingly, both the slab and the active silicon of the transistor 350 where the channel is formed preferably comprise the same material and substantially the same thickness although the thicknesses may vary in some embodiments. Both may comprise a doped semiconductor. The localized doping concentrations may vary slightly as the transistor will include source, drain and channel regions with different doping than that of the remainder of the semiconductor layer.

[0067] A thin oxide layer 315 is formed on the silicon layer 305. This thin oxide layer 315 corresponds to the transition layer of the strip loaded waveguide 300 and the gate oxide of the field effect transistor 350. Accordingly, the transition layer of the strip loaded waveguide 300 and the gate oxide of the FET 350 preferably comprise the same material and preferably have substantially the same thickness although the thicknesses may vary in some embodiments.

[0068] A patterned polysilicon layer 310 can be formed on the thin oxide layer 315. This patterned polysilicon layer 310 includes both the strip on the strip loaded waveguide 300 and the gate on the field effect transistor 350. In other embodiments, the gate of the transistor comprises single crystal silicon. Likewise, the strip of the strip loaded waveguide 300 and the gate of the transistor 350 preferably comprise the same material and have substantially the same thickness although the thicknesses may vary in some embodiments. The strip, however, may be an elongated structure to facilitate the propagation of light along a pathway from one location to another on the integrated optical chip. Likewise, this polysilicon or crystal silicon strip may turn and bend, and split or be combined with other strips. In contrast, the transistor gate is preferably not elongated and may be more square than the strip (as seen from the top, i.e., in a plane parallel to the x-z plane shown in the drawings). The shapes of the strips are not restricted to square or even rectangle (as seen from a top) as bends and turns and splitting and combining as well as intersections may be included among the many functionalities of the waveguides. Additionally, transistors often use salicides to enhance conductivity at ohmic contacts. In contrast, unless electrical connections are to be formed on the waveguides, the waveguide structure preferably does not include salicides so as to reduce absorption losses.

[0069] Advantageously, in such embodiments the strip loaded waveguide 300 and the transistor 350 can be fabricated using the same fabrication processes. For example, the same substrate may be employed. The slab 305 of the waveguide 300 and the active

silicon of the transistor 350 can be formed by the same silicon growth, deposition or other formation process. Similarly, the transition layer 315 and the gate oxide can be grown or formed in the same processing step. The strip 310 and gate can be created both by patterning polysilicon (or crystal silicon) at the same stage of the process. Accordingly, substantially the same fabrication processes can be used to produce both the transistors and the waveguides. In fact, these structures can be realized substantially simultaneously.

[0070] In the fabrication of certain semiconductor electronics, it may be desired to provide spacers such as, for example, silicon nitride spacers. In particular, gate spacers positioned adjacent to the gate of the field-effect transistor ("FET") prevent unwanted doping below the gate. This unwanted doping may result from ion implantation employed to dope source and drain regions adjacent the gate. In embodiments wherein strip loaded waveguides and electronic components are formed on the same substrate using the same fabrication process, it will often be desirable to fabricate gate spacers on both the strip loaded waveguides as well as the electronic components although such spacers can be included even when the transistors are not present on the chip.

[0071] FIGURE 6 illustrates one preferred embodiment of a strip loaded waveguide 500 having spacers 545. The strip loaded waveguide 500 comprises a slab 505, a strip 510, and a transition layer 515 therebetween. The strip loaded waveguide 500 is disposed on substrate 520 which may include a dielectric layer corresponding to the lower cladding of the strip loaded waveguide 500. Spacers (e.g., gate spacers) 545 are fabricated adjacent to the strip 510. The spacers 545 may comprise a nitride or an oxide, although other preferably nonconductive materials can be used in other embodiments. In addition to preventing ion doping in regions proximal to the gate layer in transistors, in certain circumstance, the spacers 545 may prevent doping in the region beneath strip. The spacers can also be used to alter the effective index in the slab and to thereby adjust the confinement within the guiding region and/or to prevent salicide from forming near the waveguide.

[0072] FIGURE 6 also shows liners 550 between the spacers 545 and the strip 510. These liners 550 may comprise, for example silicon dioxide, and may be used as passivation for the strip or gate 510. The liners may also act as etch-stop layers. In alternative embodiments, the liners 550 may not be present, and the spacers 545 may be in direct contact with the strip 510.

[0073] In various embodiments, the index of refraction of the strip loaded waveguide can be actively controlled with an applied field. FIGURE 7 illustrates such a configuration wherein a voltage can be applied across a strip loaded waveguide 400. The strip loaded waveguide 400 includes a slab 405, preferably comprising crystalline silicon, and a strip 410, preferably comprising polysilicon or crystalline silicon disposed on a substrate 420. The silicon slab 405 and the poly or silicon strip 410 are preferably doped so as to be conductive. As described above, a thin transition layer 415, comprising for example gate oxide such as silicon dioxide, separates the strip 410 and the slab 405. A dielectric coating 430, which may be formed from multiple layers, covers the strip 410 and slab 405 and provides electrical insulation. Conductive plugs 445 within the dielectric provide a substantially conductive pathways to the poly or silicon strip 410 and the silicon slab 405. Salicide or metalization 460, and/or ohmic contacts 440, can be formed on or in the polysilicon or silicon strip 410 or the silicon slab 405 to electrically couple the plugs 445 to these portions of the strip loaded waveguide 400. A voltage source 435 is electrically connected to the plugs 445.

[0074] Application of a voltage between the polysilicon or silicon strip 410 and the silicon slab 405 causes carriers 450 to accumulate within the guiding region 425 of the strip loaded waveguide 400. For example, depending on the applied voltage, its polarity, and the doping of the strip 410 and the slab 405, electrons or holes may accumulated or be depleted within the strip 410 or the slab 405 in regions adjacent to the thin transition layer 415 comprising gate oxide. The structure acts like a capacitor, charging with application of a voltage. The voltage creates an electric field across the thin transition layer 415 with carriers 450 accumulating (or depleting) adjacent to this transition layer 415. Preferably, the transition layer 415 is sufficiently thick such that the carriers do not traverse this barrier layer by tunneling or through defects, such as pinhole defects. Conversely, the thickness of this dielectric layer 415 is preferably not so large as to require a large voltage to be applied to the device to generate enough carriers to vary the index of the strip loaded waveguide 400. The thickness of this layer will also be affected by similar considerations in transistors formed on the same layer as the strip loaded waveguide 400. For example, in field effect transistors, the gate oxide is preferably sufficiently thick so as to prevent tunneling of carriers from the channel region into the gate but is sufficiently thin such that the voltage required to activate the transistor is not too large.

[0075] The magnitude of the applied voltage and the resultant electric field across the transition layer 415 controls the carrier density of the strip loaded waveguide 400. Preferably, the carrier density at least within the guiding region 425 is altered by the application of the voltage. This carrier accumulation or depletion may be concentrated predominately in the strip 410 or the portion of the slab 405 beneath the strip 410. The refractive index of semiconductor material alters with variation in carrier concentration. The accumulation of carriers lowers the index of refraction while depletion of carriers raises the index. The refractive index of the strip 410 and portions of the slab 405 can therefore be altered by controlling the carrier density in regions therein. For instance, by accumulating or depleting carriers in the proximity of the transition layer 415, the effective index of the strip 410 and the slab 405 can be altered as desired. In addition to affecting the refractive index, accumulation of carriers also increases absorption. Application of a field can therefore also vary the absorption coefficient associated with the waveguide.

[0076] Accordingly, the optical properties of the waveguide 400 may be controllably altered with application of an electric bias. The index of refraction can be varied to alter the effective optical path distance within the guide and adjust or tune the guide for different wavelengths, introduce or reduce phase delay, and increase or decrease optical confinement within the guide, or to otherwise affect the light propagating within the guide as desired. Since the absorption can also be controlled, the intensity of the light can be altered. Electronic biasing therefore can be employed to modulate the signal or to create other optical or electro-optical components which can be operated by actively changing the index of the refraction and/or the absorption of the waveguide or portions of it. Electronic biasing can also be used to adjust or tune waveguide structures to account for, e.g., manufacturing tolerances, or to configure the structure for different applications.

[0077] Gate spacers (not shown in FIGURE 7) may further be included as discussed above and may minimize fringing of the electric field in the case where a dielectric coating 230 does not cover the strip loaded waveguide.

[0078] In an alternative configuration illustrated in FIGURE 8, an additional poly or silicon layer 470 can be formed over the strip 410 with a dielectric region 475 separating this additional poly or silicon layer and the strip. Electrical connection may be made to this additional poly or silicon layer 470 and to the strip 410 via metalization 460 on the additional poly or silicon layer and conducting plugs 445 through the dielectric 430 to the metalization. A conductive pathway is also provided to the strip 410 by way of metal

plugs 445 and an ohmic contact 440 in the strip. Application of a voltage between the additional poly or silicon layer 470 and the strip 410 will cause carriers 450 to accumulate or be depleted in the strip 410. This arrangement enables the carrier density of the strip 410 to be altered independent of the carrier density within the slab 405. Accordingly, the index of refraction and/or absorption can be changed predominantly within the strip 410, while these properties in the slab 405 are preferably unaltered. Other configurations suited to the particular application are considered possible. For example, electrically connection can also be made with the slab 405 and a voltage can be applied between the strip 410 and the slab to alter the carrier distribution below the strip and affect the index of refraction in the slab.

[0079] In each of these designs, regardless of whether the waveguide is configured for application of an electronic field, the properties of the semiconductor portions can be adjusted based on how the material is doped with impurities, if any.

[0080] Also, as discussed above with reference to FIGURE 2, the dimensions of the strip 210 and the slab 205 may vary depending on the application of the waveguide. For example, in an application wherein the waveguide must be configured to propagate only a single optical mode, the dimensions of the strip 210 (and possibly the slab 205) may be adjusted accordingly. The dimensions of the strip portion 210 and the slab portion 205 may also depend on the wavelength of the optical signal confined in the waveguide.

[0081] In certain embodiments, the dimensions of the strip loaded waveguide 210 can be selected such that only a single mode and single polarization can be propagated in the guiding region 225. These special strip loaded waveguides are single mode waveguides that in addition only support one polarization. In one example, for instance, the dimensions of the waveguide can be designed so as to support only the transverse-electric ("TE") fundamental mode. The TE mode corresponds to light having a polarization parallel to the interface between the slab 205 and transition layer 215 or the strip 210 and the transition layer 215 (that is, with the electric field is parallel to the x-z plane as defined in FIGURE 2). For light having a wavelength of 1.55 μm , single TE mode operation can be obtained by configuring the thickness of the slab portion 205 to be approximately 110 nm, the thickness of the strip portion 210 to be approximately 95 nm, and the thickness of the transition portion 215 to be approximately 40 nm. The strip 210 has a width of about 0.5 micrometers. Finite difference time domain iterations and eigenmode solvers can be used to determine appropriate dimensions for other such strip

loaded waveguides that supports a single TE mode. In this particular case, the slab portion 205 and the strip portion 210 both comprise single crystal silicon, and the transition portion 215 comprises silicon dioxide. However, specific embodiments with different materials and different dimensions can be obtained that support only a single polarization mode. Such a configuration may be particularly advantageous in certain polarization-dependent applications where only one polarization is required. Such a waveguide, for example, can act as a linear polarizer. These waveguides that support a single polarization of the fundamental mode may also be employed to minimize crosstalk.

[0082] In alternative embodiments, as illustrated in FIGURE 9, the strip loaded waveguide 600 may comprise a strip 610 formed directly on a slab 605 that is supported by substrate 620. In such embodiments, no low-index transition layer is positioned between the strip 610 and the slab 605. The presence of the strip 610 positioned adjacent to the slab 605 induces an increase in effective index of the slab portion 605 in the region directly under the strip 610 and in proximity thereto. This increase in effective index defines a relatively high effective index guiding region 625 wherein light in one or more supported optical modes is guided along the strip loaded waveguide 600. This strip 610 comprises polysilicon and the slab 605 comprises crystal silicon. The crystal silicon slab 605 may be formed on a oxide or nitride layer on a silicon substrate. Other insulator layers may be employed as the lower cladding layer and as the substrate. For example, sapphire may be used as a substrate with crystal silicon formed thereon. One or more layers of lower index material such as glass or oxide may be formed over the strip 610 and the slab 605.

[0083] As described above, silicon is substantially optically transmissive to certain wavelengths of interest such as 1.55 microns. In addition, processes for silicon fabricating such structures are well developed. For these reasons, a waveguide comprising polysilicon and silicon is advantageous.

[0084] Although silicon is beneficial because it is substantially transparent at certain wavelengths, other materials and more particularly, other semiconductors may be employed. Furthermore, the structures described herein are not to be limited to any particular wavelength or wavelength range and may be designed, for example, for microwave, infrared, visible, and ultraviolet wavelengths.

[0085] Those skilled in the art will appreciate that the methods and designs described above have additional applications and that the relevant applications are not limited to those specifically recited above. Also, the present invention may be embodied in

other specific forms without departing from the essential characteristics as described herein. The embodiments described above are to be considered in all respects as illustrative only and not restrictive in any manner.

WHAT IS CLAIMED IS:

1. A strip loaded waveguide comprising:
 - a slab portion having a first refractive index (n_1),
 - a strip portion having a second refractive index (n_2), and
 - a transition portion between the slab portion and the strip portion, the transition portion having a third refractive index (n_3) that is less than the first refractive index (n_1) and the second refractive index (n_2).
2. The waveguide of Claim 1, wherein the transition portion comprises silicon dioxide.
3. The waveguide of Claim 1, wherein the slab portion comprises semiconductor.
4. The waveguide of Claim 3, wherein the slab portion comprises single crystal silicon.
5. The waveguide of Claim 1, wherein the strip portion comprises polysilicon.
6. The waveguide of Claim 1, wherein the strip portion comprises single crystal silicon.
7. The waveguide of Claim 1, wherein the strip portion comprise silicon nitride.
8. The waveguide of Claim 1, wherein the slab portion and the strip portion comprise substantially the same material.
9. The waveguide of Claim 1, further comprising a substrate that supports said slab and said strip.
10. The waveguide of Claim 9, wherein the substrate comprises a silicon wafer.
11. The waveguide of Claim 9, wherein the substrate comprises sapphire.
12. The waveguide of Claim 1, further comprising a lower cladding layer adjacent said slab, said lower cladding layer having a refractive index less than the first refractive index (n_1) of said slab.
13. The waveguide of Claim 12, wherein the difference between first refractive index (n_1) of said slab and said refraction index of said lower cladding layer is at least about 1.
14. The waveguide of Claim 13, wherein the difference between first refractive index (n_1) of said slab and said refraction index of said lower cladding layer is at least about 2.

15. The waveguide of Claim 12, wherein said lower cladding layer comprises a layer of silicon dioxide.

16. The waveguide of Claim 12, wherein said lower cladding layer comprises a layer of silicon nitride.

17. The waveguide of Claim 12, further comprising an upper cladding adjacent said slab and said strip, said upper cladding has a refractive index that is less than both the first refractive index (n_1) and second refractive index (n_2).

18. The waveguide of Claim 17, wherein the difference between a refractive index of said upper cladding and said first refractive index (n_1) of said slab and said second refractive index (n_2) of said strip is at least about 1.

19. The waveguide of Claim 18, wherein the difference between a refractive index of said upper cladding and said first refractive index (n_1) of said slab and said second refractive index (n_2) of said strip is at least about 2.

20. The waveguide of Claim 17, wherein the upper cladding comprises glass.

21. The waveguide of Claim 17, wherein the upper cladding comprises silicon dioxide.

22. The waveguide of Claim 17, wherein the upper cladding and the lower cladding comprise substantially the same material.

23. The waveguide of Claim 1, wherein said strip has a width and thickness, and said slab and transition regions have respective thicknesses so as to support a fundamental optical mode with a cross-sectional power distribution profile having two intensity maxima.

24. A strip loaded single-mode waveguide for propagating light having a wavelength, comprising:

a slab portion,

a strip portion disposed with respect to the slab portion to form a guiding region, a first portion of the guiding region being in the strip portion, and a second portion of the guiding region being in the slab portion, the guiding region configured to propagate light of the wavelength only in a single spatial mode and only in a transverse electric mode.

25. The strip loaded single-mode waveguide of Claim 24, wherein said slab portion and strip portion comprise single crystal silicon.

26. The strip loaded single-mode waveguide of Claim 25, wherein said slab portion has a thickness of approximately 90 nm and said strip portion has a thickness of approximately 40 nm.

27. The strip loaded single-mode waveguide of Claim 24, further comprising a transition portion between the slab portion and the strip portion, such that a third portion of the guiding region is located in the transition portion.

28. A strip loaded waveguide comprising:

a slab portion,

a strip portion disposed with respect to the slab portion to form a guiding region, a first portion of the guiding region being in the strip portion, and a second portion of the guiding region being in the slab portion, the guiding region propagating light in a single spatial mode with a cross-sectional power distribution profile having two intensity maxima, one of which is located in the slab portion and the other of which is located in the strip portion.

29. The strip loaded waveguide of Claim 28, wherein the slab comprises semiconductor.

30. The strip loaded waveguide of Claim 29, wherein the slab comprises silicon.

31. The strip loaded waveguide of Claim 30, wherein the strip comprises silicon.

32. The strip loaded waveguide of Claim 28, further comprising a transition portion positioned between the slab portion and the strip portion, such that a third portion of the guiding region is location in the transition portion.

33. The strip loaded waveguide of Claim 32, wherein said transition portion comprises oxide.

34. A waveguide having a guiding region for guiding light through the waveguide, the guiding region comprising a layer of polycrystalline silicon juxtaposed with a layer of crystal silicon.

35. The waveguide of Claim 34, wherein said layer of crystal silicon comprises a slab and said layer of polycrystalline silicon comprises a strip formed thereon, said strip and said slab forming a strip waveguide.

36. The waveguide of Claim 35, wherein said strip has a width and a thickness and said slab has a thickness to support a single optical mode.

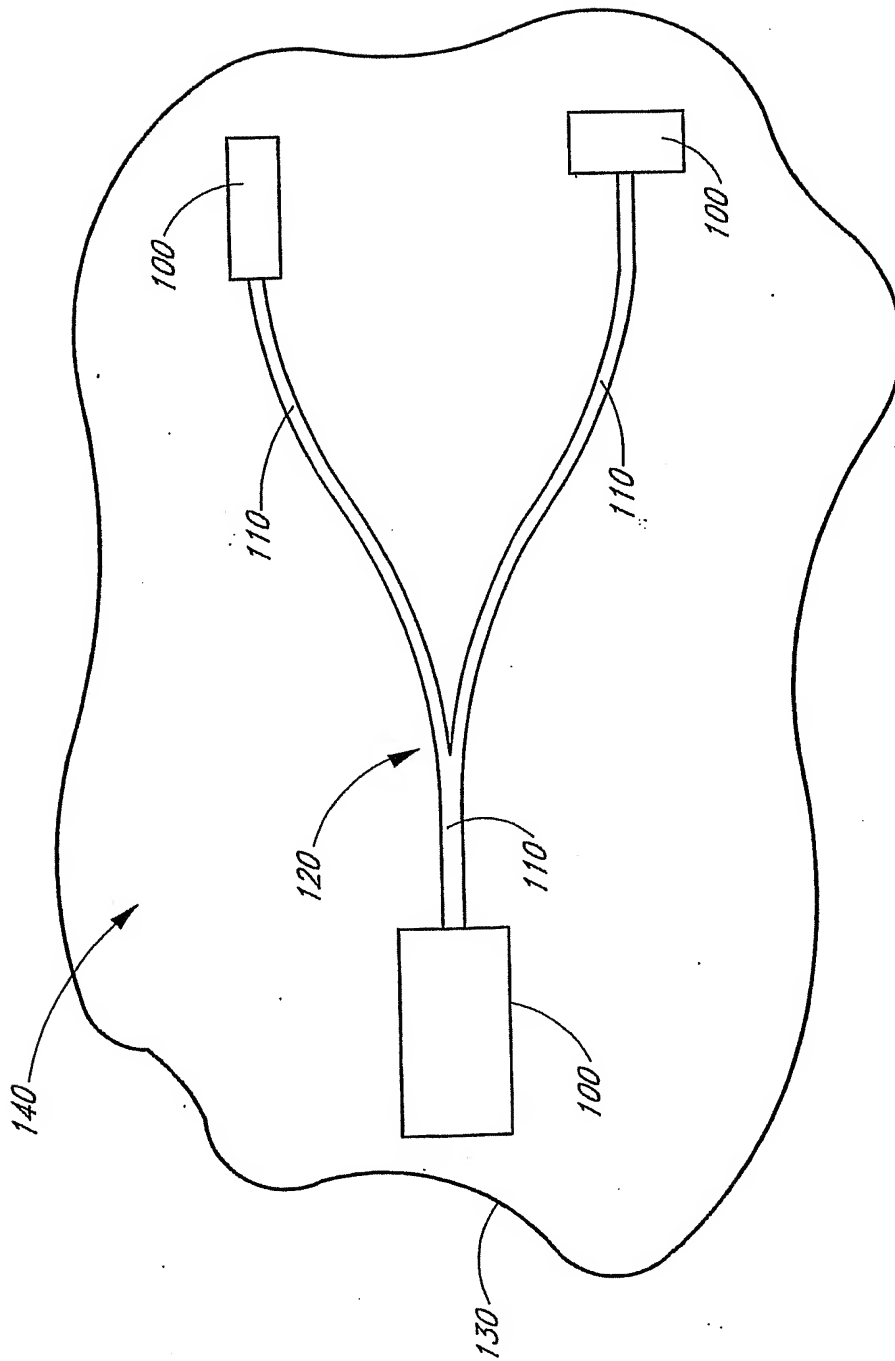
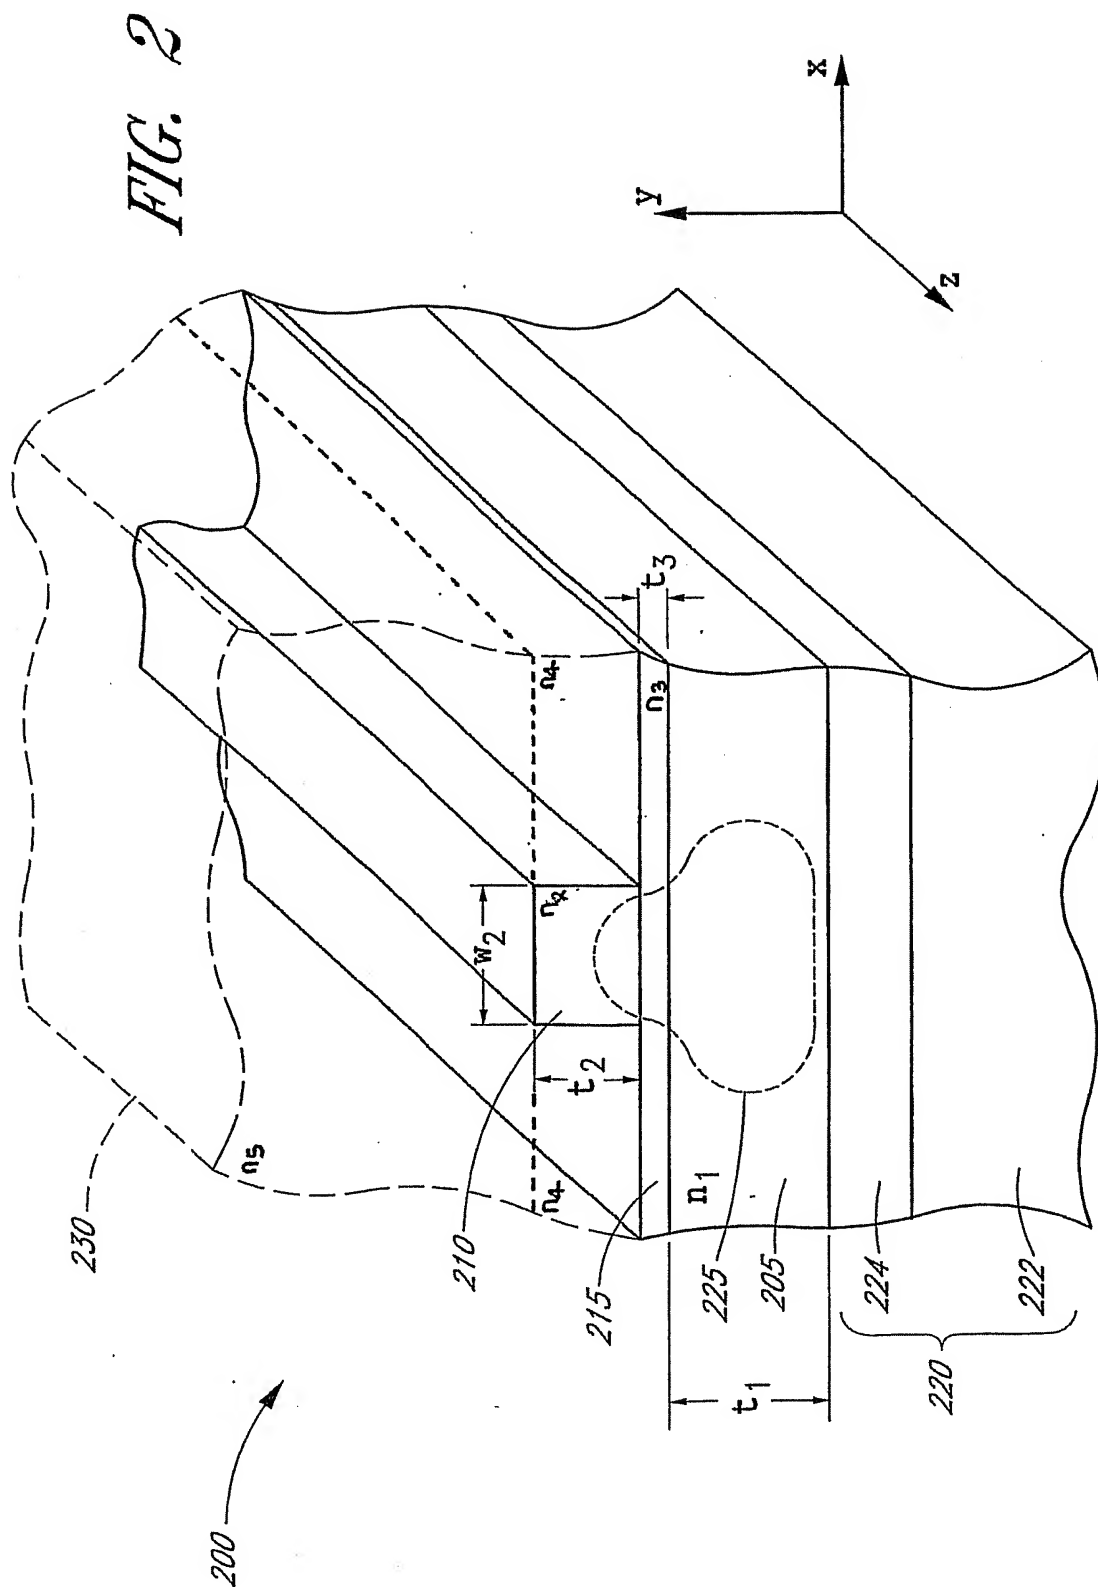


FIG. 1




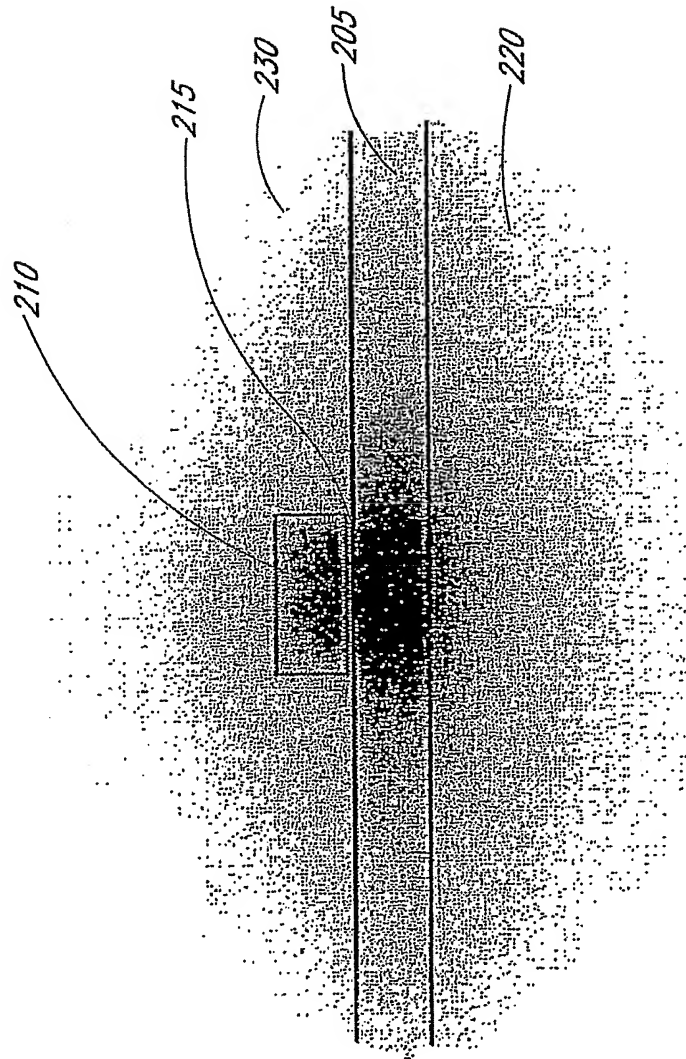


FIG. 3

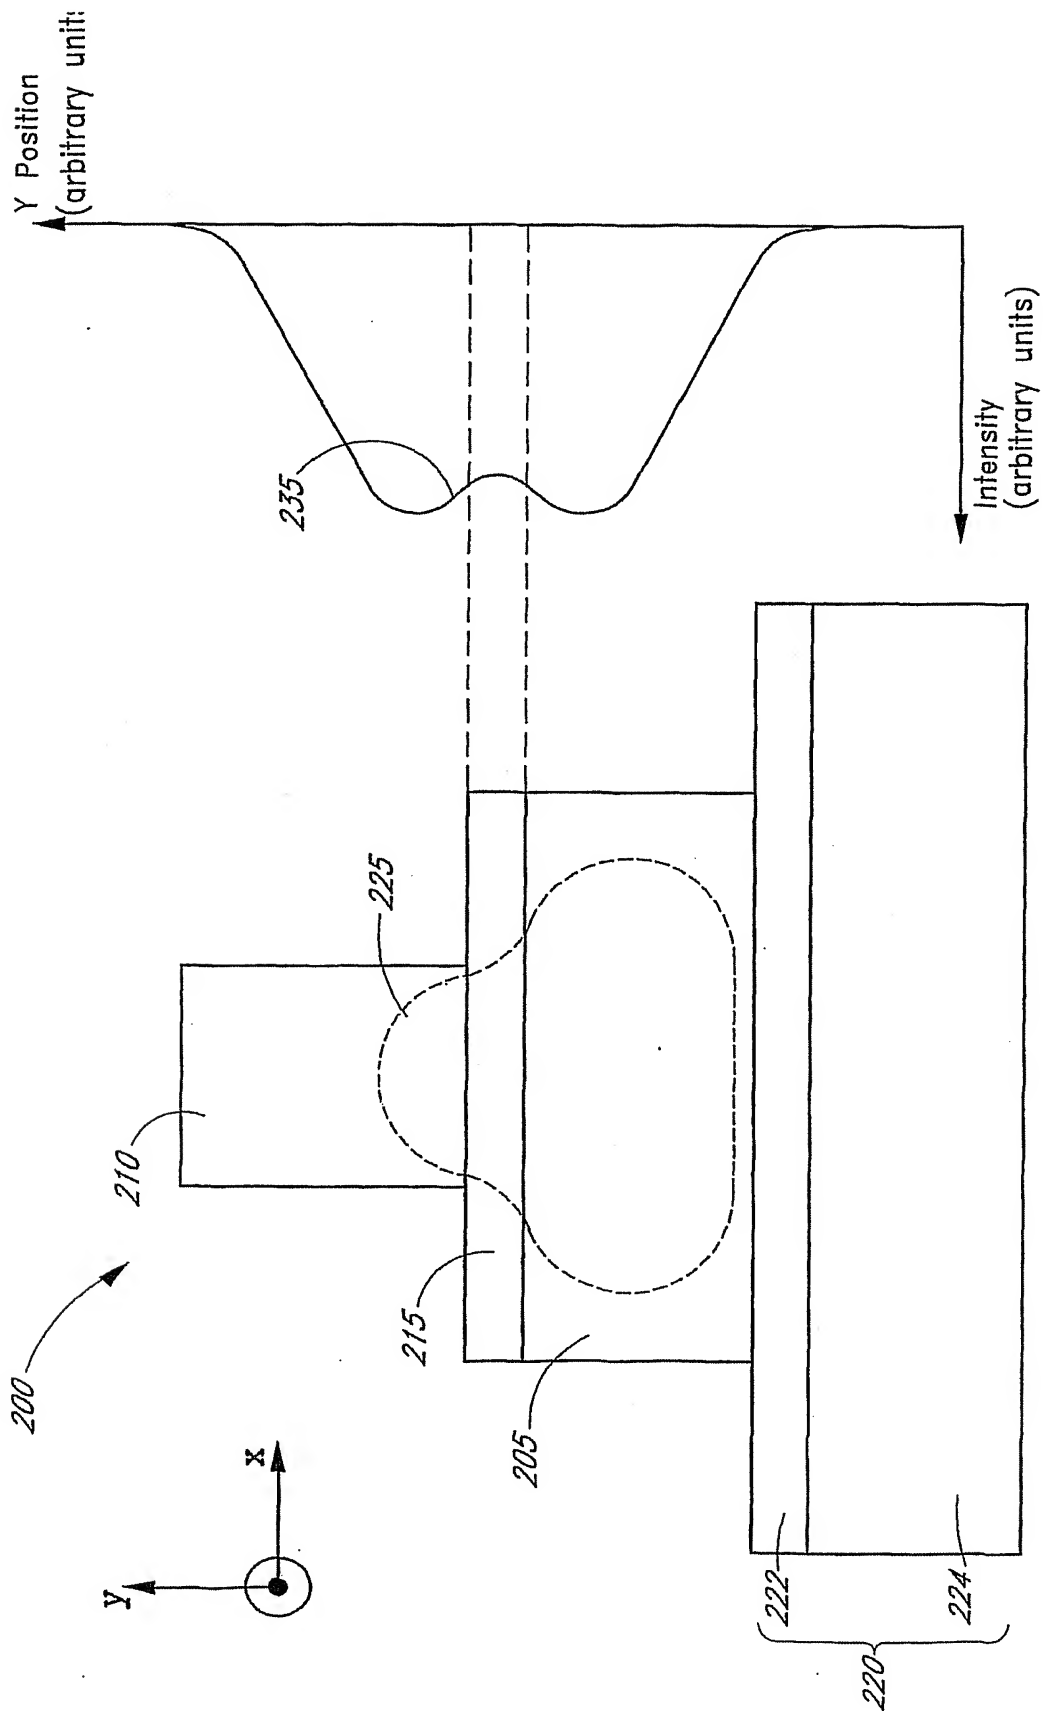


FIG. 4

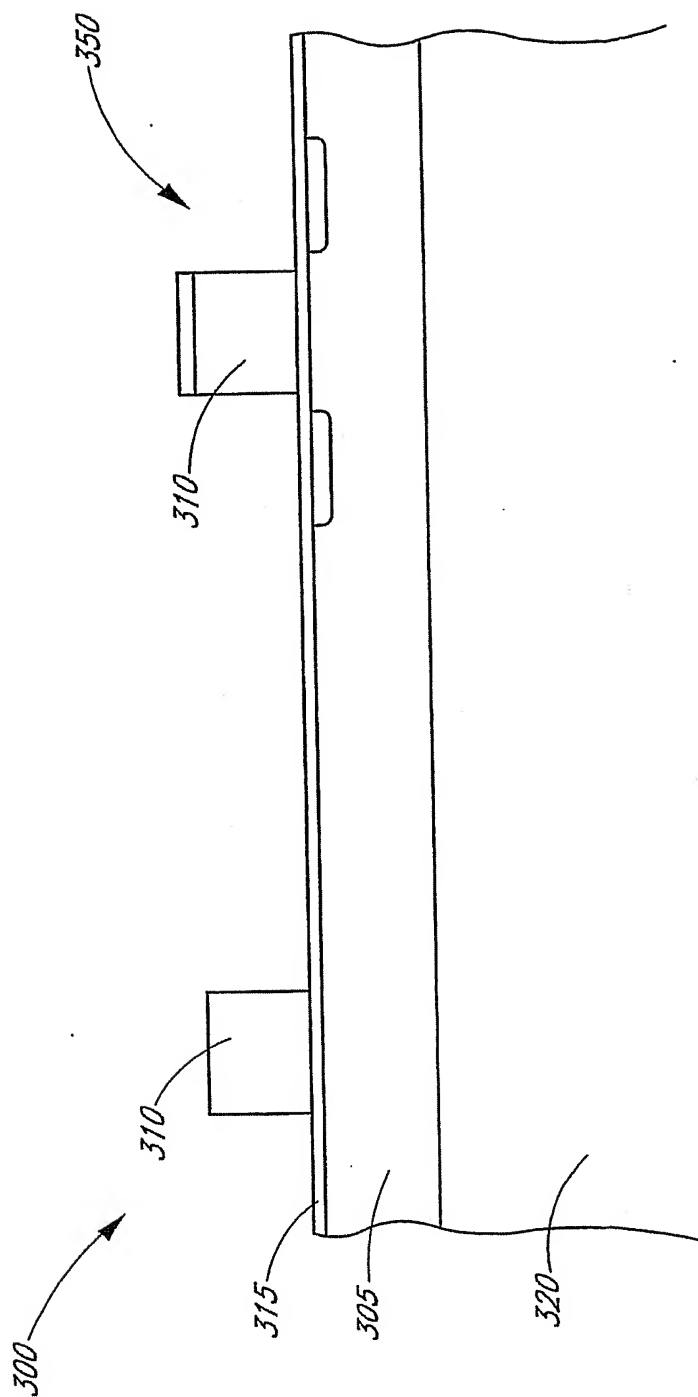


FIG. 5

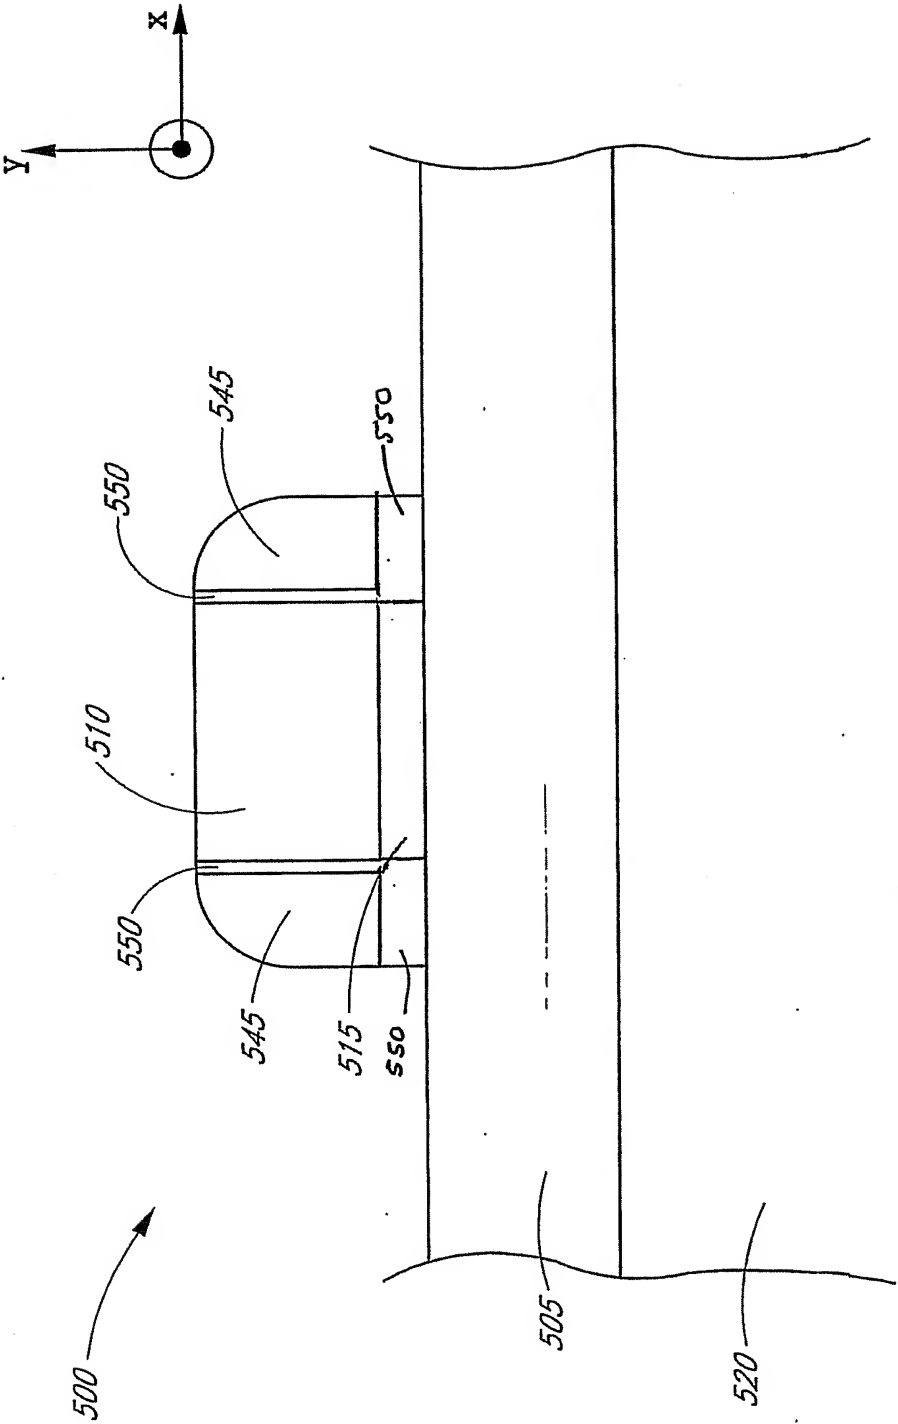


FIG. 6

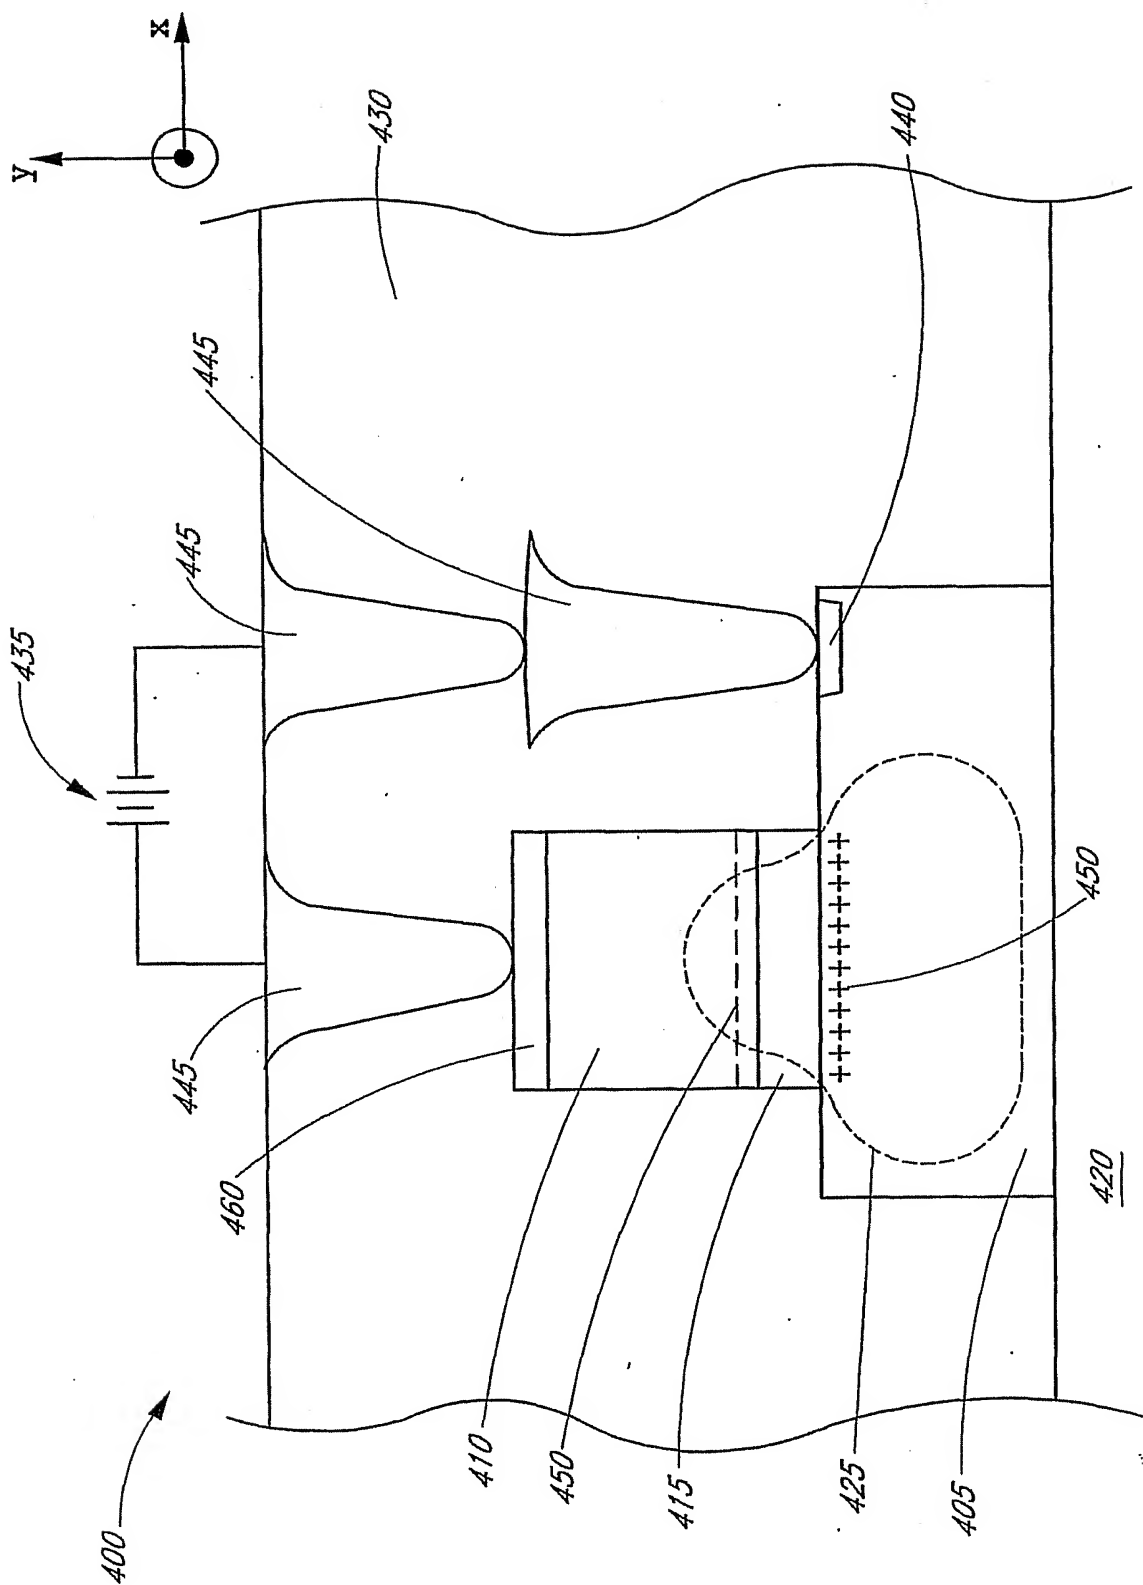


FIG. 7


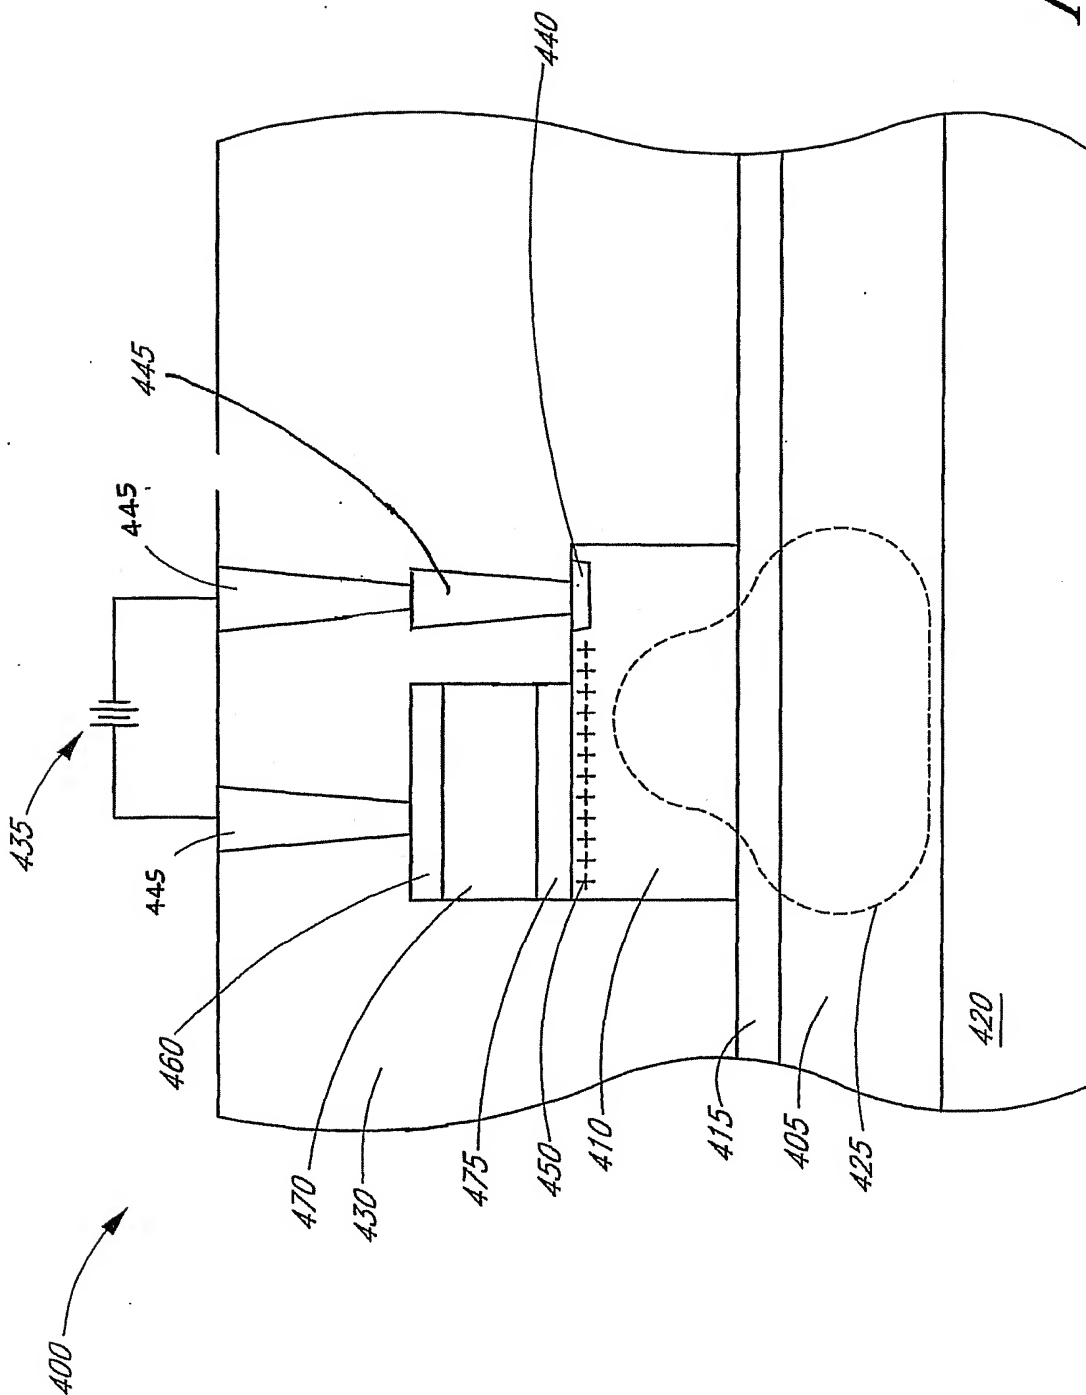


FIG. 8

Figure 9

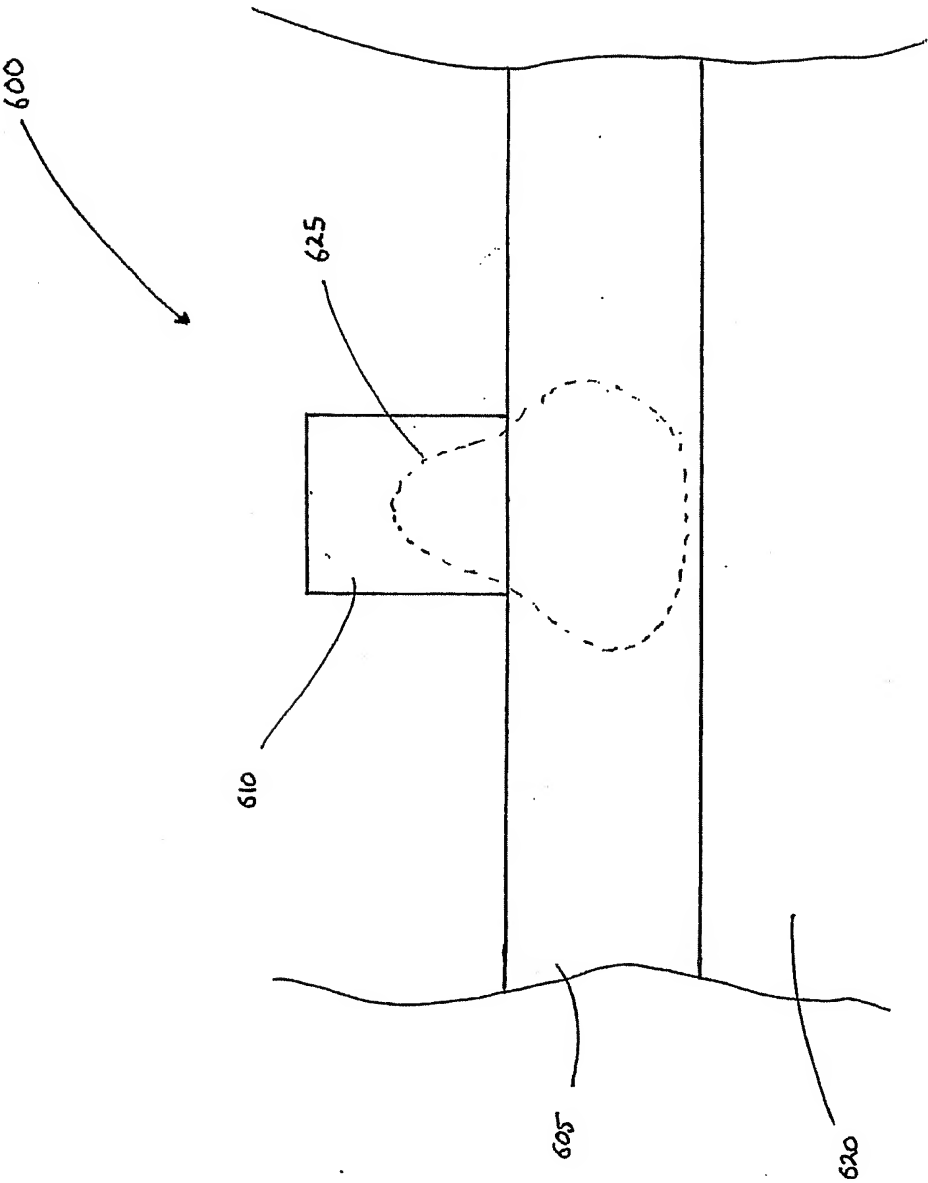

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US02/29028

A. CLASSIFICATION OF SUBJECT MATTER		
IPC(7) : G02B 06/10 US CL : 385/129		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) U.S. : 385/129-132		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	US 5,078,516 A (KAPON et al) 07 January 1992 (07.01.1992), see column 2, line 27 through column 3, line 15.	1,3,12,17,23,24,27-29,32 ----- 2, 4-11,13-16,18-22,25,26,30,31,33-36
Y	US 5,682,455 A (KOVACIC et al) 28 October 1997 (28.10.1997), see claim 1 and column 5, lines 14-34.	34-36
X --- Y	US 5,745,630 A (VAWTER et al) 28 April 1998 (28.04.1998), see figures 2A and 2B, and column 1, lines 42-61.	1,3,12,17,23,24,27-29,32 ----- 2,4-11,13-16,18-22,25,26,30,31,33-36
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 22 November 2002 (22.11.2002)		Date of mailing of the international search report 26 FEB 2003
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703)305-3230		Authorized officer Daniel Petkovsek Telephone No. (703) 305-6919 <i>Deborah P. Vega</i> Deborah P. Vega Paternal Specialist

Form PCT/ISA/210 (second sheet) (July 1998)

INTERNATIONAL SEARCH REPORT

PCT/US02/29028

C. (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	US 4,999,686 A (AUTIER et al) 12 March 1991 (12.03.1991), see figures 7a-7c, column 6, lines 62-68.	1,3,12,17,23,24,27-29,32 ----- 2,4-11,13-16,18-22,25,26,30,31,33-36
A	US 5,737,474 A (AOKI et al) 07 April 1998 (07.04.1998), see figures 1B, 2B, 3B, column 2, lines 37-63.	1-36
X	US 5,459,807 A (DOUMUKI et al) 17 October 1995 (17.10.1995), see figure 1, column 5, lines 34-45.	34-36
Y,P	US 2002/0094183 A1 (WU et al) 18 July 2002 (18.06.2002), see figures 2A and 2D; paragraphs [0032] through [0044].	1-36

Form PCT/ISA/210 (second sheet) (July 1998)

INTERNATIONAL SEARCH REPORT

PCT/US02/29028

East Searched

Search Terms: refract\$6 near3 (index of indices), waveguide or substrate, thin film, maxim\$

Form PCT/ISA/210 (second sheet) (July 1998)

